


TR-2XE2707CB

316L Explosion Proof Control Box with Built-in Power Adaptor

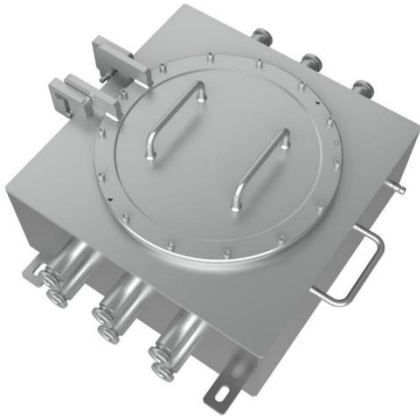

Key Features

- Stainless steel 316L with anti-corrosion surface spray treatment
- 12 cable outlets
- ATEX and IECEx certified explosion-proof performance
- Ingress protection, IP68
- Purchase certified cable glands sealed with setting compound for cable routing if using electronic devices inside.

Specifications

Parameters

Weight	Approx. 54.5 kg (120.2 lb.)
Startup and Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F). Humidity 95% or less (non-condensing)
Material	stainless steel 316L
Package Dimension	642 mm × 642 mm × 340 mm (25.28" × 25.28" × 13.39")
Dimension	Overall Dimension: 534.0 mm × 506.2 mm × 236.5 mm (21.02" × 19.93" × 9.3"), Internal Dimension: 400.0 mm × 400.0 mm × 165.0 mm (15.75" × 15.75" × 6.5"), with 1 power adapter
Protection	IP66: IEC 60529-2013,IP68: IEC 60529-2013
Explosion-Proof Protection	Ex db II C T6 Gb/Ex tb IIIC T80°C Db
Power	Rated input : AC 100 ~ 240V Rated output : DC 12V / 2A

Note: Specifications are subject to change without notice.