

TR-ZJ1677-XS(SS316L)

Flexible Conduit for Cable Protection



Key Features


- Body: NBR, braided steel wire
- Connector: 316L stainless steel
- G-3/4 conduit threadAluminum Alloy
- Ingress protection, IP68
- For cable protection in explosive environments

Specifications

Parameters

Material	Body: NBR, braided steel wire; Connector: 316L stainless steel
Dimension	Ø 25 mm × 1000 mm (0.98" × 39.37")
Weight	Approx. 0.7 kg (1.54 lb.)
Conduit Thread	G-3/4
Dimension	Dimension
Operating Conditions	-40°C to +80°C (-40°F to 176°F), 95%RH or less (non-condensing)
Ingress protection	IP68

Dimension

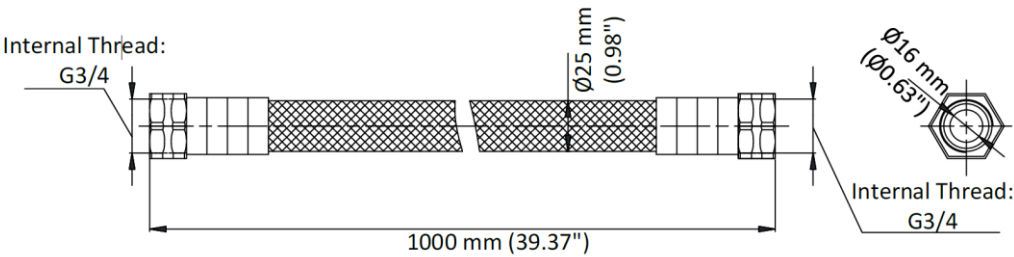

Note: Specifications are subject to change without notice.